


PCE-7128

LGA1150 Intel® Xeon®/Core™i3/ Pentium® SHB DDR3/SATA 3.0/USB3.0/ Dual GbE /3 Displays

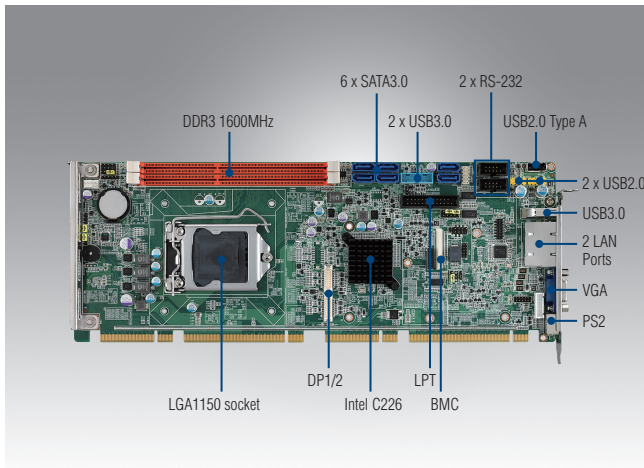

Features

- Supports Intel® Xeon® E3 1200v3 series, Core™ i7/i5/i3 LGA1150 processors with C226
- Dual Channel (ECC/Non-ECC) DDR3 1333/1600 up to 16 GB
- Supports PCIE 3.0, USB 3.0, SATA3.0, SW Raid 0, 1, 5, 10
- Supports CRT and 2 x DP/DVI-D (optional) display
- Supports out-of-band remote management with AMT9.0 and IPMI
- Supports Advantech TPM module (LPC I/O)
- Supports SUSIAccess and embedded software APIs


Quiet

CE FCC

Specifications

Haswell refresh CPUs are supported from BIOS V2.xx		
CPU	i7-4790S i5-4590S i5-4590T i3-4360 i3-4350T i3-4340TE	
Base Frequency	3.2GHz 3.0GHz 2.0GHz 3.7GHz 3.1GHz 2.6GHz	
L3 Cache	8MB 6MB 6MB 4MB 4MB 4MB	
Haswell CPUs are supported by both BIOS V1.xx and V2.xx		
CPU	E3-1275v3 E3-1225v3 E3-1268v3 i7-4770S i7-4770TE i5-4570S i5-4570TE i3-4330 i3-4330TE G4320 G4320TE	
Base Frequency	3.5GHz 3.2GHz 2.3GHz 3.1GHz 2.3GHz 2.9GHz 2.7GHz 3.5GHz 2.4GHz 3.2GHz 2.3GHz	
L3 Cache	8MB 8MB 8MB 8MB 8M 6MB 4MB 3M 3M 3MB 3MB	
ECC Memory Supported	Yes Yes Yes N/A N/A N/A Yes Yes Yes Yes	
SKU/Chipset	Intel C226	
BIOS	AMI 128Mbit SPI Flash	
Bus		
PCI-Express	One x16 or Two x8 plus four x1 to backplane	
PCI	Four 32-bit 33 MHz PCI Masters to backplane	
Memory		
Technology	Dual channel (ECC/Non-ECC) DDR3 1333/1600 UDIMM (Note: Please select Intel ECC supported processor to enable ECC function)	
Max. Cap.	16 GB (8 GB per DIMM)	
Socket	DDR3 240-pin DIMM x 2	
Graphics		
Controller	Chipset integrated Intel HD Graphics	
VRAM	Shared system memory is subject to OS	
CRT	Supports resolution up to 1920 x 2000 pixel at 60Hz	
DVI-D	Supports resolution up to 1920 x 1200 pixel at 60Hz	
Triple Display	CRT+DP/DVI-D+DP/DVI-D	
Ethernet		
Interface	10/100/1000 Mbps	
Controller	LAN 1: Intel I217LM LAN 2: Intel I210AT	
Connector with LED	RJ45 x 2	
SATA		
S/W Raid 0, 1, 5, 10	SATA 3.0 x 6 (600 MB/sec)	
Rear I/O		
USB 3.0	1	
Ethernet	2	
VGA	1	
PS/2	1 (PS/2 Y cable supports 1 x keyboard and 1 x mouse)	
Internal Connector		
USB	Night USB2.0 (Pin-header*4+USB Type A*1+ 4 on backplane); Two USB3.0 (Pin header)	
SATA	6	
DP/DVI-D	2 (Pin header)	
COM	2	
Parallel	1	
IrDA	1	
GPIO	8bit	
Watchdog Timer		
Output	System reset	
Interval	Programmable 1-255 sec	
Miscellaneous		
Audio	Intel High Definition audio interface (required an audio extension module P/N: PCA-AUDIO-HDA1E)	
Power Requirement		
Test environment	Core i7-4770S DDR3 1600 8GB x 2	
Voltage	+12V +5V +3.3V +5Vsb -12V -5V	
Current	4.02A 1.36A 0.81A 0.09A 0A 0A	
Environment		
Temperature/Humidity	Operating	Non-operating
	0 ~ 60 °C (32~140 °F); Depends on CPU frequency and cooler solution Operating humidity: 40 °C @ 85% RH Non-Condensing	-40 ~ 85 °C and 60 °C @ 95% RH Non-Condensing
Physical		
Dimensions (L x H)	338 x 122 mm (13.3" x 4.8")	

Block Diagram

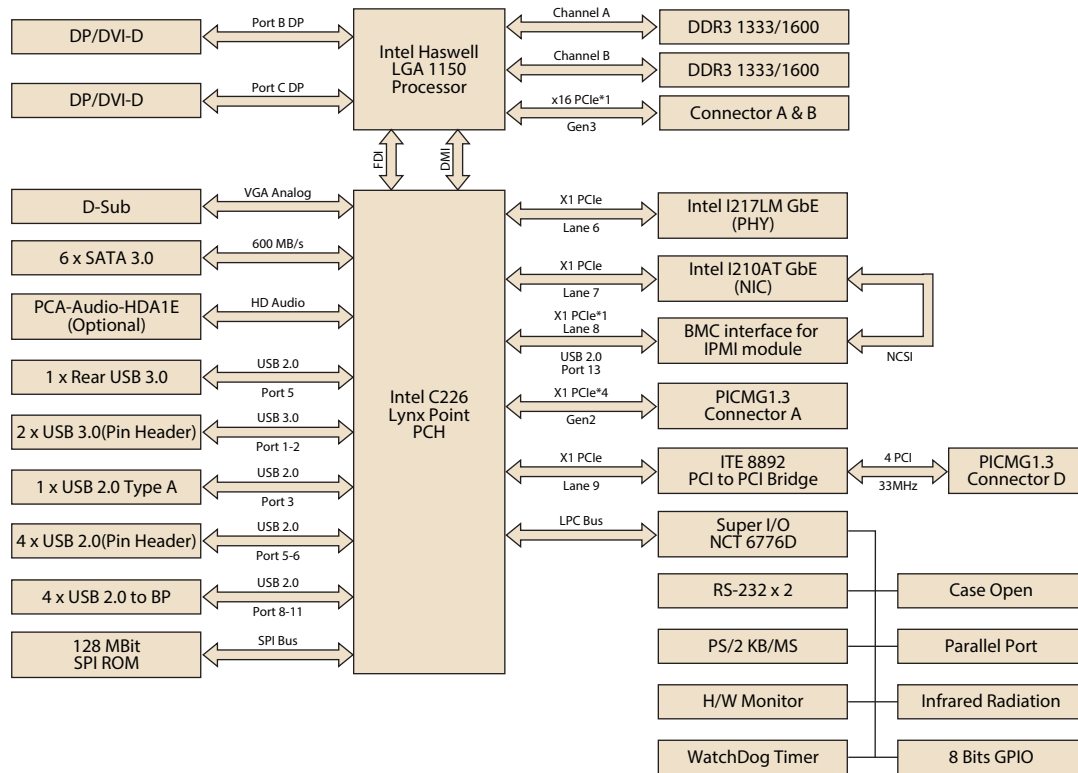

Ordering Information

Part Number	PCH	Memory	Backplane	LAN	VGA	DP/DVI-D	COM	SATA III	USB 2.0	USB 3.0	S/W Raid	AMT	IPMI
PCE-7128G2-00A1E	C226	ECC	PCE-5BXX PCE-7BXX	2	Yes	2*	2	6	10	3	Yes	Yes	Yes

Note: Both DP and DVI-D cable are optional.

Packing List

Part Number	Description	Quantity
1700003194	Serial ATA HDD data cable	x2
1700022749-11	Serial ATA HDD power cable	x1
1701260305	COM + printer ports cable kit	x1
1700060202	Keyboard and mouse Y-cable	x1
1700008461	4-port USB cable kit	x1
9689000068	Jumper package	x1
2190000902	Warranty Card	x1
2006512800	Startup manual	x1
2066512802	Utility CD	x1

Optional Accessories

Part Number	Description
1960047831N001	PCE-7128 optimized CPU Cooler (2U)
PCA-AUDIO-HDA1E	Audio module
PCA-TPM-00A1E	TPM module (Trust Platform management)
PCA-COM232-00A1E	4 Ports RS-232 Module by LPC
PCA-COM485-00A1E	4 Ports RS-485/422 Module by LPC
IPMI-1000-00A1E	IPMI2.0 module(Remote control management)
1700020277-01	2 ports USB 3.0 cable w/ BKT(30cm)
1700021831-01	DP to DVI-D cable w/ BKT
PCE-DP10-00A1E	DP to DP cable w/ BKT

I/O View



PCE-7128G2-00A1E