

# WISE-4471

## Cat. NB1/ Cat. M1 Wireless I/O Module

**NEW**



### Introduction


NB-IoT is a new wireless communication technology with low power consumption in wide area networks. It is an international standard defined by the 3rd Generation Partnership Project (3GPP). NB-IoT feature low power consumption and remote transmission and can be constructed directly on LTE networks based on licensed spectrum bands.

WISE-4471 series is a 4G cellular based IoT wireless sensor node compliant with LTE Cat. NB1 and Cat. M1 with built in antenna for flexible installation. In addition to offering various I/O types, WISE-4471 series provides a data logger and direct cloud connectivity so that data can be published to the cloud by messaging protocol such as MQTT, CoAP, LwM2M with secure socket supported.

### Features


#### Automatic Connection with Cloud

By pre-integration messaging protocol such as MQTT, WISE-4471 series can integrate with cloud services automatically, reducing setup complexity for rapidly implementation.

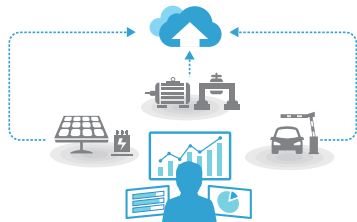

#### Open Connectivity for Cloud and System

WISE-4471 series support CoAP and MQTT communication protocols while continually integrating mainstream cloud services to simplify the complexity of data integration.

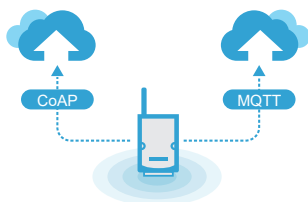


### Features

- Global coverage of NB-IoT and eMTC frequency bands
- Application-ready I/O combination with optional IP65 I/O
- Wide voltage power input with 10 ~ 50V<sub>DC</sub>
- Data buffered function with time stamp reducing data lost
- Fast and easy deployment to reduce operation cost
- Supports direct cloud service for IoT integration
- Support MQTT, CoAP & LwM2M protocol


### Legacy and Existing Devices to NB-IoT/eMTC

WISE-4471 series offer digital I/O, 4-20-mA analog and RS-232/485 interfaces for various applications, quickly providing NB-IoT/eMTC network functions to existing devices.

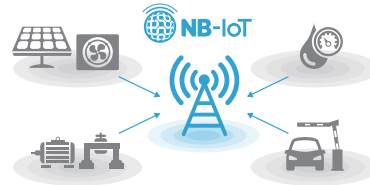


### Upgrade Legacy Equipment though Cloud Management

WISE-4471 series NB-IoT/eMTC sensor nodes are suitable for data collection from widely distributed stations. No complicated programming, setup, or registration are required for a fast introduction into IoT applications such as smart cities, smart water/electricity meters, and remote facility management.

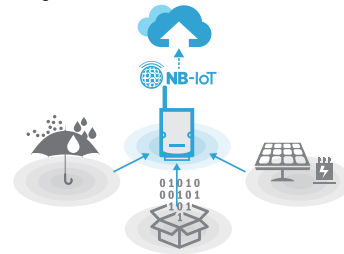

### Device to Cloud System Architecture

WISE-4471 series wireless sensor nodes support the open communication protocols MQTT, CoAP, and LwM2M. Users can transmit data to specific public cloud services or existing private cloud platforms by publish/subscribe or push.

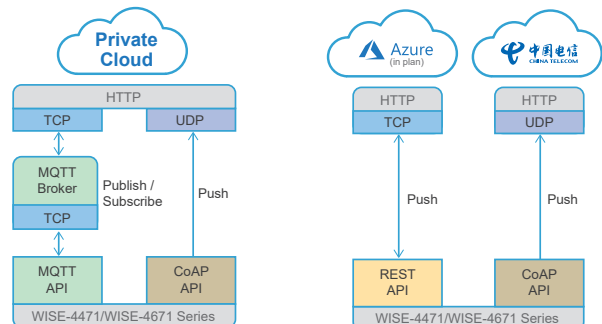

## Specification

### Wireless Communication

- 3GPP Standards R, 13, Cat. NB1/ Cat. M1
- Frequency Band 2, 3, 4, 5, 8, 12, 13, 20, 28
- Antenna Type Internal

### General

- Power Input 10 ~ 50V<sub>DC</sub> external power
- Power Consumption 2.0 W
- Configuration Interface Micro-B USB
- SIM 3FF/Micro SIM
- Connector WISE-4471-S2xxx Plug-in screw terminal block (I/O and power)  
WISE-4471-S4xxx M12 4-pin code-A male x 1 (Power)  
M12 8-pin code-D female x 1 (I/O)
- LED Indicator Status, Error, Tx, Rx, Signal Level
- Mounting DIN 35 rail, wall, pole and stack
- Dimension (W x H x D) 70 x 112 x 38 mm
- Certification CE, NCC, FCC, IC

## WISE-S214 (4AI/4DI)

### Analog Input

- Channels 4
- Resolution 16bits Bipolar; 15bits Unipolar
- Sampling Rate 10Hz (Total) with 50/60Hz Rejection
- Accuracy ±0.1% for Voltage Input; ±0.2% for Current Input
- Input Range 0~150mV, 0~500mV, 0~1V, 0~5V, 0~10V, ±150mV, ±500mV, ±1V, ±5V, ±10V, 0~20mA, ±20mA, 4~20mA  
>1MΩ (Voltage)  
240 Ω (External resistor for current)  
Scaling and Averaging
- Input Impedance
- Support Data

### Digital Input

- Channels 4 (Dry Contact)
- Supports 200Hz Counter Input (32-bit + 1-bit overflow)
- Supports keep/discard counter value on power-off
- Support inverted digital input status

## WISE-S250 (6DI, 2DO & 1RS-485)

### Digital Input

- Channels 6 (Dry Contact)
- Supports 3kHz Frequency Input

### Digital Output

- Channels 2

### Serial Port

- Port Number 1
- Type RS-485
- Data Bits 7, 8
- Stop Bits 1, 2
- Parity None, Odd, Even
- Baud Rate (bps) 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200
- Protocol Modbus/RTU (Total 64 addresses by 30 max. instructions)

## WISE-S251 (6DI/1RS-485)

### Digital Input

- Channels 6 (Dry Contact)
- Supports 200Hz Counter Input (32-bit + 1-bit overflow)
- Supports keep/discard counter value on power-off
- Support inverted digital input status

### Serial Port

- Port Number 1
- Type RS-485
- Data Bits 7, 8
- Stop Bits 1, 2
- Parity None, Odd, Even
- Baud Rate (bps) 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200
- Protocol Modbus/RTU (Total 64 address by max. 20 instructions)

## WISE-S472 (1DI/2COM) IP65

### Serial Port

- Port Number 2
- Type Port 1: RS-485; Port 2: RS-485/232
- Serial Signal RS-485: DATA+, DATARS-, 232: Tx, Rx, GND
- Data Bits 7, 8
- Stop Bits 1, 2
- Parity None, Odd, Even
- Baud Rate (bps) 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200
- Protection 15 kV ESD
- Protocol Modbus/RTU (Total 32 address by max. 8 instructions)

### Digital Input

- Channels 1
- Input Type Dry Contact (Wet Contact by request)
- Logic Level 0: Open; 1: Close to DCOM
- Supports 200Hz Counter Input (32-bit + 1-bit overflow)
- Keep/Discard Counter Value when Power-off
- Supports 200Hz Frequency Input
- Supports Inverted DI Status

### Environment

- Operating Temperature -20 ~ 60°C
- Storage Temperature -40 ~ 85°C
- Operating Humidity 20 ~ 95% RH
- Storage Humidity 0 ~ 95% RH

## Ordering Information

- WISE-4471 Cat. NB1/Cat. M1 Wireless Module

### WISE-S200 I/O Module

- WISE-S214 4AI/4DI
- WISE-S250 6DI, 2DO & 1RS-485
- WISE-S251 6DI & 1RS-485

### WISE-S400 IP65 I/O Module

- WISE-S414 4AI (Upon Request)
- WISE-S472 1DI, 1RS-485, 1RS-485/RS-232

### Accessories

- PWR-242-AE DIN Rail Power Supply (2.1A Output Current)
- PWR-243-AE Panel Mount Power Supply (3A Output Current)
- PWR-244-AE Panel Mount Power Supply (4.2A Output Current)

## Dimensions

Unit: mm

