EKI-2705LX

5-port 2.5GbE Unmanaged Industrial Ethernet Switch



Features

- Provides 5*2.5GbE ports with auto MDI/MDIX
- Support 10M/100M/1000M/2.5Gbps auto negotiation
- Support jumbo frame transmission up to 12k
- Provide slim size, DIN-rail
- Support redundant 9-60V_{DC} power input
- Dual power input and relay

5 C F F C ROHS COMPULATION STATES

Introduction

The EKI-2705LX is an unmanaged industrial switch with 5 x 2.5GbE ports, it helps to instantly upgrade your network to take advantage of 2.5GbE-enabled devices without requiring any new network cables. Featuring an industrial-grade design with high quality, high stability and high efficiency and plug-and-play set up, the EKI-2705LX makes it easy for you to create an affordable high-speed network environment for your environment.

Specifications

Communications

Standard IEEE 802.3, 802.3u, 802.3ab, 802.3bz
LAN 10/100/1000/2.5GBase-T(X)

• Transmission Distance Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable)

Transmission Speed Up to 12.5Gbps

Interface

• Connectors 5 x RJ45

3-pin removable terminal (power)

DC power jack

3-pin removable terminal (relay)

• LED Indicators P1, P2, ALM, LAN

Power

Power Consumption 6 W

Power Input
9-60 V_{DC}, redundant dual inputs

• Fault Output 1 Relay Output

Mechanism

Dimensions (W x H x D) 28 x 90 x 99 mm

• **Enclosure** IP30, Metal shell with solid mounting kits

Mounting DIN-rail, Wall

Protection

Power Reverse PresentOverload current Present

Environment

■ Operating Temperature -10 ~ 60°C

Storage Temperature -40 ~ 85°C (-40 ~ 185°F)
Operating Humidity 10 ~ 95% (non-condensing)
Storage Humidity 10 ~ 95% (non-condensing)


MTBF 199,564hrs

Certifications

SafetyEMILVD EN62368CE, FCC Class A

EMS EN55032

EN55032 EN55024 EN61000-3-2 EN61000-3-3 EN61000-6-2 EN61000-6-4

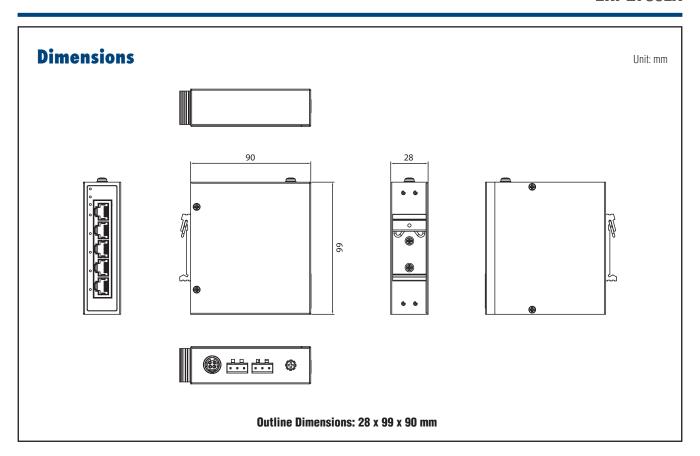

Ordering Information

• **EKI-2705LX-A** 5-port 2.5GbE Unmanaged Industrial Ethernet Switch